


Elbow Adapter Male


Male Flare Connector
Male NPT Threads



Part No.	O.D. Tube Size	Male NPT Size	Orifice	A	B
FMP42EAM	1/4	1/8	0.13 (03.30 mm)	1.34 (34.04 mm)	0.72 (18.29 mm)
FMP44EAM	1/4	1/4	0.13 (03.30 mm)	1.34 (34.04 mm)	0.97 (24.64 mm)
FMP46EAM	1/4	3/8	0.13 (03.30 mm)	1.34 (34.04 mm)	0.85 (21.59 mm)
FMP62EAM	3/8	1/8	0.19 (04.83 mm)	1.55 (39.37 mm)	0.85 (21.59 mm)
FMP64EAM	3/8	1/4	0.25 (06.35 mm)	1.64 (41.66 mm)	0.95 (24.13 mm)
FMP66EAM	3/8	3/8	0.25 (06.35 mm)	1.53 (38.86 mm)	1.05 (26.67 mm)
FMP68EAM	3/8	1/2	0.25 (06.35 mm)	1.73 (43.94 mm)	1.13 (28.70 mm)
FMP84EAM	1/2	1/4	0.38 (09.65 mm)	1.73 (43.94 mm)	1.13 (28.70 mm)
FMP86EAM	1/2	3/8	0.38 (09.65 mm)	1.73 (43.94 mm)	1.13 (28.70 mm)
FMP88EAM	1/2	1/2	0.38 (09.65 mm)	1.82 (46.23 mm)	1.13 (28.70 mm)
FMP812EAM	1/2	3/4	0.38 (09.65 mm)	2.03 (51.56 mm)	1.50 (38.10 mm)
FMP128EAM	3/4	1/2	0.46 (11.68 mm)	2.03 (51.56 mm)	1.38 (35.05 mm)
FMP1212EAM	3/4	3/4	0.63 (16.00 mm)	2.05 (52.07 mm)	1.50 (38.10 mm)
FMP1612EAM	1	3/4	0.75 (19.04 mm)	2.50 (63.50 mm)	1.75 (44.45 mm)
FMP1616EAM	1	1	0.88 (22.35 mm)	2.50 (63.50 mm)	1.88 (47.75 mm)

Union Adapter Female

Male Flare Connector
Female NPT Threads

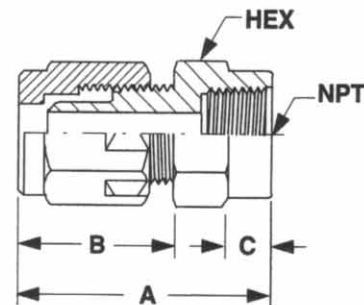

Part No.	O.D. Tube Size	Female NPT Size	Orifice	A	B	C	Hex Flat
FMP42UAF	1/4	1/8	0.13 (03.30 mm)	1.63 (41.40 mm)	1.06 (26.92 mm)	0.30 (07.62 mm)	0.56
FMP44UAF	1/4	1/4	0.13 (03.30 mm)	1.63 (41.40 mm)	1.06 (26.92 mm)	0.33 (08.38 mm)	0.94
FMP46UAF	1/4	3/8	0.13 (03.30 mm)	1.63 (41.40 mm)	1.06 (26.92 mm)	0.31 (07.88 mm)	1.00
FMP48UAF	1/4	1/2	0.13 (03.30 mm)	1.84 (46.74 mm)	1.06 (26.92 mm)	0.40 (10.16 mm)	1.13
FMP62UAF	3/8	1/8	0.25 (06.35 mm)	1.82 (46.23 mm)	1.13 (28.70 mm)	0.30 (07.62 mm)	0.69
FMP64UAF	3/8	1/4	0.25 (06.35 mm)	1.82 (46.23 mm)	1.13 (28.70 mm)	0.32 (08.13 mm)	0.94
FMP66UAF	3/8	3/8	0.25 (06.35 mm)	1.82 (46.23 mm)	1.13 (28.70 mm)	0.31 (07.88 mm)	1.00
FMP68UAF	3/8	1/2	0.25 (06.35 mm)	1.91 (48.51 mm)	1.13 (28.70 mm)	0.40 (10.16 mm)	1.13
FMP84UAF	1/2	1/4	0.29 (07.37 mm)	2.00 (50.80 mm)	1.33 (33.78 mm)	0.30 (07.62 mm)	0.88
FMP86UAF	1/2	3/8	0.38 (09.63 mm)	2.00 (50.80 mm)	1.33 (33.78 mm)	0.32 (08.13 mm)	1.13
FMP88UAF	1/2	1/2	0.38 (09.63 mm)	2.07 (52.58 mm)	1.33 (33.78 mm)	0.40 (10.16 mm)	1.13
FMP812UAF	1/2	3/4	0.38 (09.63 mm)	2.23 (56.64 mm)	1.33 (33.78 mm)	0.38 (09.63 mm)	1.38
FMP128UAF	3/4	1/2	0.46 (11.68 mm)	2.19 (55.63 mm)	1.42 (36.07 mm)	0.40 (10.16 mm)	1.38
FMP1212UAF	3/4	3/4	0.63 (16.00 mm)	2.32 (58.93 mm)	1.42 (36.07 mm)	0.40 (10.16 mm)	1.63
FMP1216UAF	3/4	1	0.63 (16.00 mm)	2.56 (65.02 mm)	1.42 (36.07 mm)	0.63 (16.00 mm)	1.75
FMP1616UAF	1	1	0.88 (22.35 mm)	2.75 (69.85 mm)	1.63 (41.40 mm)	0.63 (16.00 mm)	1.75